

JUST VERTICAL USER MANUAL

Light Timer Manual



A Quick Note On Your Timer


Welcome to the legacy user manual for setting up the the light timer on your EVE indoor garden! This manual is for the digital light timer found on EVE gardens purchased starting in 2020 and ending (mostly) in December 2022.

Inside this manual, you'll find everything you need to know about setting up your light timer. We've made sure to keep the instructions clear, straightforward, and easy to follow. Our goal is to ensure that you can get back to what matters most - growing beautiful, healthy plants in your EVE indoor garden - without any unnecessary complications.

We're here to support you every step of the way. If you find yourself feeling a bit puzzled or if you have any questions, **don't hesitate to reach out to our friendly team at support@justvertical.com**. We're more than happy to help clarify any points or provide the additional information you might need.


Thank you for choosing Just Vertical for your indoor gardening needs. Happy gardening!

Setting Your Timer For Lights

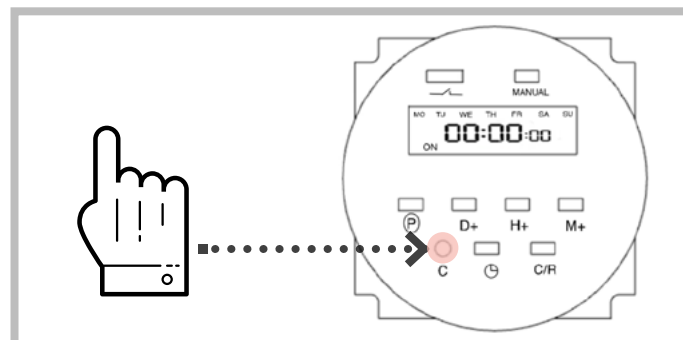


1 Reset Your Timer

Grab a sharp pointed object like a pen or a chopstick. Push in the 'C' button once to reset your timer.

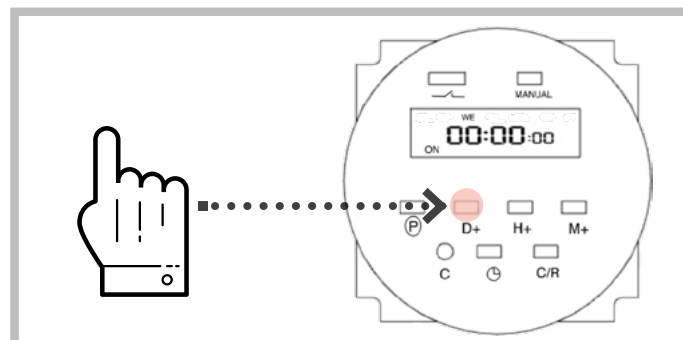


2 Set The Day

Press the 'D +' button until you reach your current day. You will notice the day symbol change at the top of timer.

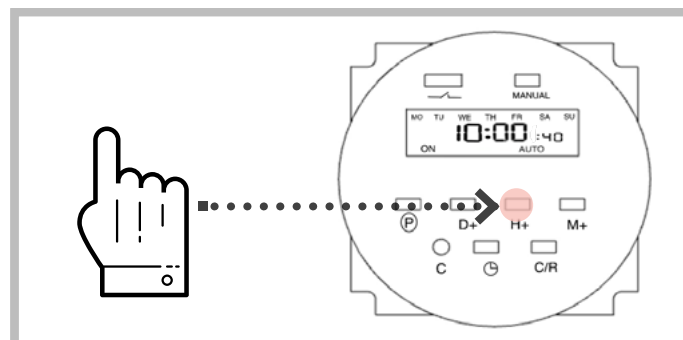

3 Set The Hour

Press the 'H +' button until you reach your current hour (in 24H format). You will notice the hour change on the display.

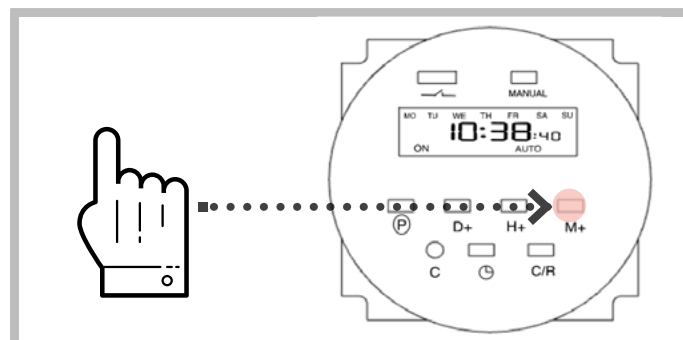


4 Set The Minute

Press the 'M +' button until you reach your current minute. You will notice the minutes change on the display.




Setting Your Timer (continued)

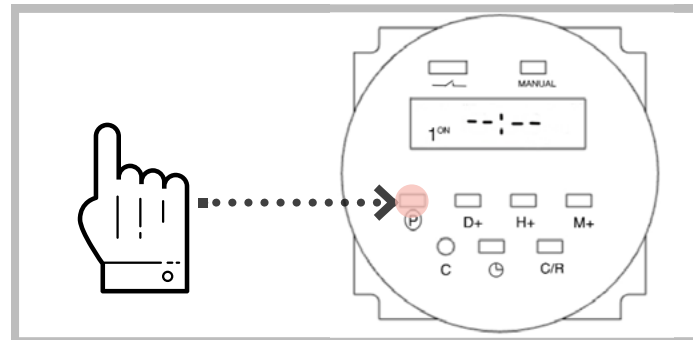

5 Move To Timer Mode

Press the 'P' button to switch mode. The display will show 1^{ON} beside the time. The time will disappear.

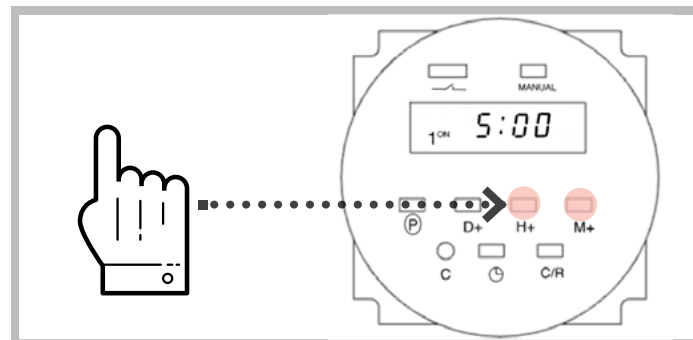


2 Set Turn On Time


Set your turn on time with 'H+' and 'M+'. We recommend having your lights on for 18 hours and off for 6 hours.

TIP

How To Unlock Your Timer


Noticing that when you're pressing buttons, nothing is happening on the display?

When you leave your timer for longer than 30 seconds without pressing a button, the timer will lock automatically. The timer will show the  symbol on the display if the timer is locked.

To re-enable your timer to make changes, you simply need to press the C/R button 4 times to unlock the timer. Once the  symbol disappears, you can make changes.




Setting Your Timer (continued)

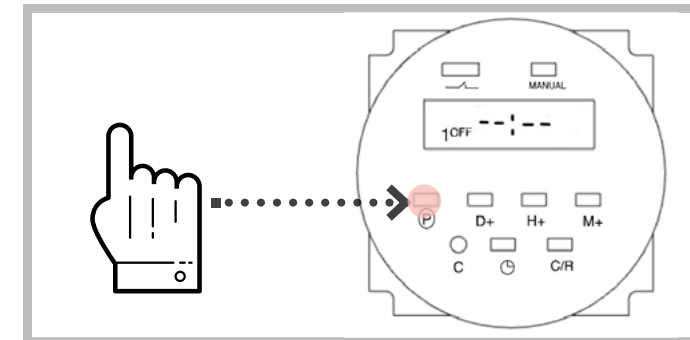


1 Switch Timer Mode

Press the 'P' button to switch mode. The display will now show 1^{OFF} beside the time.

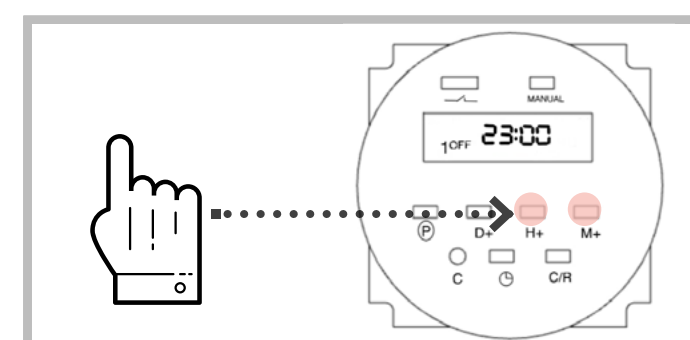


2 Set Turn Off Time

Set your turn off time with 'H+' and 'M+'. We recommend having your lights on for 18 hours and off for 6 hours.

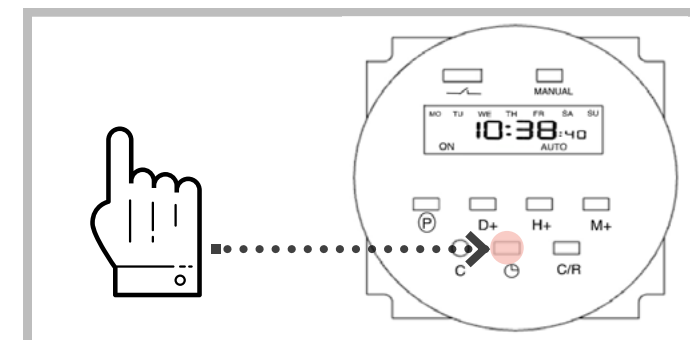

3 Exit Timer Mode

Press the clock symbol to exit the timer mode. Your turn on and turn off times are now set.

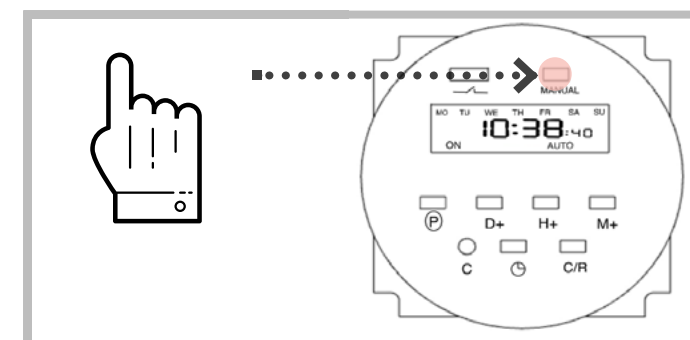


4 Turn On Light

Press 'Manual' on the top left repeatedly until your lights switch on. The red light will switch on once your light is on.




Setting Your Timer (continued)

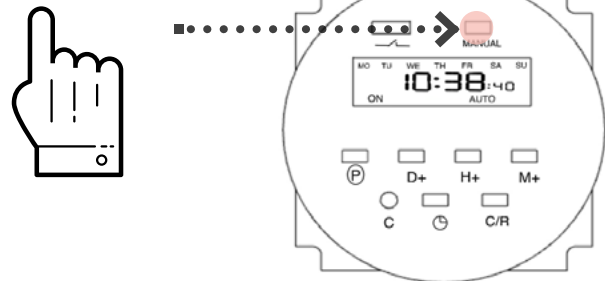

1 Set Auto Timer

Once the red light is on, press the 'Manual' button again until the display cycles through and shows 'Auto' below the time.

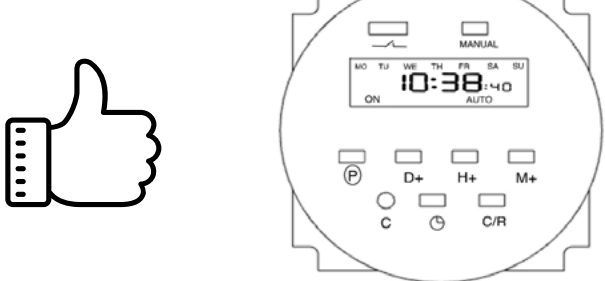

2 Your Timer Is Set!

Monitor your timer throughout the day, ensuring the light switches on and off. If you have issues, repeat the steps.



Thank You!
We look forward to
growing with you.

